


## MAINTENANCE AND WARRANTIES

---

MP MODULAR PUMPTRACKS\_ V3 RELOCATABLE MODELS

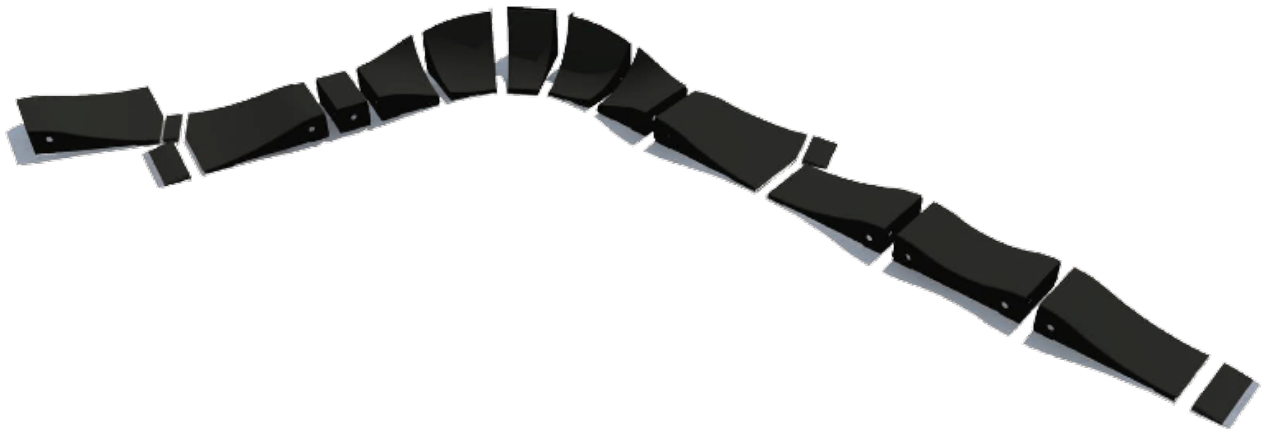

V3 Modular Pump Track Modules

The Modular Pump Track from Parkitect consists of perfectly designed and engineered modules. A guaranteed geometry is formed by assembling multiple modules, creating a progressive riding track for bikes, scooters and skateboards.

Modular Pump Tracks are subject to heavy use by a range of users on various wheeled equipment in unsupervised outdoor environments and are subject to vandalism.

Periodic inspections must be carried out to ensure public safety and extend the asset's life.

The asset owner is responsible for maintaining a program of routine inspections and maintenance.

Parklife recommends a weekly or monthly check and an annual inspection by Parklife to ensure the highest level of product performance.

Parklife is to be contacted immediately if any issues are detected.

Parklife must authorise any significant repairs, and Parklife must supply replacement parts.

Not doing so voids the warranty and may result in serious injury.

The following is a guideline only.

### GENERAL

All routine inspections and maintenance must be documented, recorded, and signed by the responsible individual.

Routine inspections and maintenance are the sole responsibility of the owner.

Inspections are to be carried out by a competent person.

A Maintenance Record must be completed noting the date, the type of maintenance (weekly, monthly, annually), comments, completed by and signature.

Pesticides and Herbicides are to be kept well clear of the track.

Vehicles (including maintenance mowers) must be kept at least 2m from the track.

Shrubs are to be maintained at least 1m from the track.

New trees are to be planted at least 4m from the track.

## WEEKLY or MONTHLY OPERATIONAL INSPECTION

Inspection and maintenance will include a visual inspection of the track (including but not limited to):

Check for continuity, including alignment of joints between each module for a smooth transition.

Check that all modules are fully bolted together.

Check for completeness and that there are no missing parts.

Check the integrity of the fibreglass riding surface along the complete track and ensure the track is free from anything that would cause the user to slip, including but not limited to sand, soil, leaves, gravel, oil, etc.

Check the 2m safety clearance area around the track at any given point for hazards, including but not limited to sharp objects, debris, potholes, vegetation, and vertical objects (park furniture, fences, barriers, etc.).

Check that all modules are firmly placed on a level, compact, free-draining surface and that the track's rubber feet have not sunken into the ground.

Check that no modules are sitting in standing water.

Check that no vegetation is growing up under the track.

Check that safety signage is still clearly visible.

## ANNUAL MAIN INSPECTION

Engage Parklife to carry out an annual inspection, including but not limited to the above weekly or monthly operational inspection plus:

Dis-assemble, inspect the timber under structure, plywood side panels and re-seal.

Clean and inspect all modules.

Check all fixings and replace them as needed.

Check the fibreglass riding surface and repair any scrapes as needed.

Check the ground levels, surface structural integrity, and drainage and make good before re-assembling the track.

## RECOMMENDED MAINTENANCE AND REPAIR METHODS

Clear debris on the riding surface with a broom.

Clean the riding surface with a soft brush and a non-abrasive cleaner.

Repair major scrapes in the fibreglass riding surface with a Polyurethane Resin (consider [Solarez](#)) and finish with [Resene Lumbersider](#) to match the track colour. Request the RAL panel colour from Parklife.

Repair minor scrapes in the fibreglass riding surface with [Resene Lumbersider](#) (specification sheet to follow) to match the track colour. Request the RAL panel colour from Parklife.

Maintain and seal solid timber under structure and plywood side panel cut edges (ends) with [Resene Waterborne Woodsman](#) (specification sheet to follow).

## GRAFITTI

Parklife to be contacted should the track be graffitied so they can best advise the right strategy to remove.

## CONTACTS

Parklife

[+64 9 871 0256](tel:+6498710256)

[info@parklife.co.nz](mailto:info@parklife.co.nz)

[www.parklife.co.nz](http://www.parklife.co.nz)

## WARRANTY

Parklife passes on to the Customer the benefit of the Parkitect's warranty on materials and workmanship.

Parklife provides a 1-year warranty on installation.



PARKITECT

**PARKITECT AG**

Reuteneustrasse 22,  
CH-9042 Speicher AR

## WARRANTY

**What is Covered?** This warranty covers defects in materials and workmanship at the time of transfer of risks in PARKITECT pumphacks sold completely assembled by PARKITECT or an authorized PARKITECT dealer ("Product").

**How Long Does Coverage Last?** This voluntary manufacturer's warranty is limited to:

**10 years** for the functional strength of all precast concrete elements,

**5 years** for the functional strength of all: galvanizing and non-coated steel/metal parts, solid plastic parts and wooden parts preserved by oil impregnation on a regular basis, depending on local weather conditions,

**2 years** on surfaced plywood boards, wood surface treatment, as well as galvanizing, sealants & paint coatings,

from the date of purchase of the Product and is limited to the first purchaser of the Product. Failure to report a defect to PARKITECT or to a PARKITECT dealer within 2 months after first possible detection shall make this warranty void. Transfer of the Product from the first purchaser to another person terminates this limited warranty.

The limited warranty shall only be granted in case a maintenance service has been effected according to inspection and maintenance requirements as set forth in the Owner's manual and Product's maintenance instructions. The effected annual maintenance service shall be confirmed by stamp and signature. In case such an annual maintenance service has not been effected the warranty shall be void. Costs for maintenance and service have to be borne by the owner of the Product.

Repaired or replaced components of the Products are covered for the remainder of the original warranty period and subject to the conditions outlined in the original warranty, to the extent permitted by law.

Hereby PARKITECT grants a worldwide voluntarily manufacturer's warranty. To the extent permitted by law and unless a shorter duration is stipulated by law, any warranties implied by law are limited in duration to maximum ten, respectively five or two years, from the date of purchase of the Product and are limited to the first purchaser of the Product.

**What Will PARKITECT Do?** PARKITECT will replace or repair any defective Product at PARKITECT's discretion. Shipping costs incurred from replacement will be borne by PARKITECT. The defective parts shall be returned upon request. You must pay charges in connection with replacement of any non-defective parts. In such a case, you will be alerted to the advisability of replacing non-defective parts, so you can pre-authorize the costs.



PARKITECT

**PARKITECT AG**

Reuteneustrasse 22,  
CH-9042 Speicher AR

**What Does this Limited Warranty Not Cover?** This limited warranty does not cover defects which did not exist before the transfer of risks. This limited warranty does not cover Products used in rental operations. This limited warranty does not cover purchases of demonstration Products (used Product). This limited warranty does not cover improper installations, exposure to vandalism, misuse or intensive strain or exposure to unforeseen environmental conditions. This limited warranty does not cover any defect caused by “wear and tear” as well as by loose or unscrewed nuts and bolts, surface corrosion on metal parts and paint peel-off, discoloured surfaces and other cosmetic issues, cosmetic wood deformation, splintering and resin leaks, by accident, neglect, improper handling, improper transportation, abuse, misuse, an act of God, improper assembly, non-compliance with recommended maintenance and care procedures, improper or incorrectly performed maintenance or repairs performed by someone other than an authorized PARKITECT dealer, use of parts or devices not consistent with the Product, and alteration of the Product. All Products come with a manual; please carefully follow the instructions located there or affixed elsewhere to the Product. To the extent permitted by law, consequential and incidental damages are not recoverable under this limited warranty.

**How Do You Make a Claim Under this Limited Warranty?** To make a claim under this limited warranty, you must notify PARKITECT of the claimed defect within the warranty period and provide a full description of the defect and corresponding photos as evidence. Please contact your authorized PARKITECT dealer, call PARKITECT’s customer service or the national PARKITECT distributor. All returned Products must be accompanied by proof of purchase (invoice) from an authorized PARKITECT dealer or this limited warranty will not apply. In case of replacement or refund, returned Product becomes the property of PARKITECT.

It is obligatory to show a protocol of effected inspection and maintenance service together with the defective part in case of a warranty claim.

**How Do State Laws Affect Your Rights Under This Limited Warranty?** This limited warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

### **Recommendation**

We strongly recommend that you use only authorized PARKITECT dealers for yearly maintenance services and for repairs, as improper or incorrectly performed maintenance or repairs voids this limited warranty. Costs for maintenance service have to be borne by the consumer.

# Resene Lumbersider Low Sheen CoolColour™ waterborne

Resene Lumbersider Low Sheen CoolColour is based on a tough 100% acrylic resin to ensure maximum durability in all exposed conditions. Imparts a natural low sheen look that is fully washable.

Resene CoolColour technology performs optimally on dark colours that are the most prone to heat build-up.

## exterior

### Typical uses

- Beams
- Block and brickwork
- Concrete and plaster
- Deckings/decks
- Fibre and particle board
- Fibre cement
- Galvanised iron
- Repaints
- Roughcast/stucco
- Timber
- Weatherboards

Please ensure the current Data Sheet and Safety Data Sheet are consulted prior to specification or application of Resene products. View Data Sheets online at [www.resene.com/datasheets](http://www.resene.com/datasheets). If in doubt contact Resene.

**Vehicle type**  
**Pigmentation**  
**Solvent**  
**Finish**  
**Colour**

**Dry time (minimum)**  
**Recoat time (minimum)**  
**Primer required**  
**Theoretical coverage**  
**Dry film thickness**  
**Usual no. of coats**  
**Abrasion resistance**  
**Chemical resistance**  
**Heat resistance**  
**Solvent resistance**  
**Durability**  
**Thinning and clean up**  
**VOC**

### Physical properties

100% acrylic  
Titanium dioxide/fillers  
Water  
Low sheen  
Selected colours from the Resene Total Colour System  
45 minutes at 18°C  
2 hours  
Yes, dependent on surface  
12 sq. metres per litre  
33 microns at 12 sq. metres per litre  
2; some colours may require an additional coat  
Very good  
Good  
Thermoplastic  
Good  
Excellent  
Water.  
c. 35 grams per litre (see [Resene VOC Summary](#))

### Performance

### Performance and limitations

1. Reflects heat improving the life of paint finish and substrate and improving interior conditions inside the painted structure.
2. Excellent adhesion to primed and natural substrates, timber, concrete and old paintwork.
3. Excellent as a roof coating where a low sheen finish is required.
4. May be used on surfaces that are to be used for the collection of drinking water.
5. An Environmental Choice approved product.

### Limitations

1. Do not apply at temperatures below 10°C or when it is liable to drop below 10°C during the drying period. Dry and recoat times will vary with environmental conditions.
2. Use Resene Wood Primer (see [Data Sheet D40](#)) or Resene TimberLock (see [Data Sheet D48](#)) for the first coat where the timber surface is showing signs of deterioration as a result of weathering, particularly on deckings.
3. Disconnect roof downpipes until after the first shower of rain in order to flush away surplus non-toxic wetting agents before the surface is used for the collection of drinking water.
4. Areas coated with this product unmodified may not comply with New Zealand Building Code D1 3.3(d). Refer also to New Zealand Building Code D1 2.0 table 2.



# Lumbersider Low Sheen CoolColour™

## Surface preparation

Clean down thoroughly to remove all dirt, dust and loose material. Ensure surface is free from oil, grease and mould. Any timber that has been exposed to weather for more than one week requires thorough sanding of the surface or treatment with Resene TimberLock (see [Data Sheet D48](#)).

If moss and mould are present, treat with Resene Moss & Mould Killer (see [Data Sheet D80](#)). Waterblasting at 21,000 kps (3000 psi) is the best surface preparation method prior to painting weathered cementitious surfaces or galvanised steel.

When painting new or old galvanised roofs, ensure the surface to be painted is thoroughly cleaned using Resene Roof and Metal Wash (see [Data Sheet D88](#)). Flush clean with freshwater. Consult Resene for technical advice on painting of old cementitious roof tiles.

## Concrete

Use Resene Limelock (see [Data Sheet D809](#)) on fresh cementitious surfaces to trap any free lime and prevent the appearance of lime staining.

## Timber

Where a staining type of timber exists an application of Resene Wood Primer (see [Data Sheet D40](#)) may be required. Vitex timber may take on a green colour when washed with Timber and Deck Wash (see [Data Sheet D813](#)). If this occurs apply a full wet coat of a 5% white vinegar solution, scrub and leave until the green colour disappears then wash down with copious amounts of fresh water.

*Sanding dust from old lead or chromate based paints or old building materials containing asbestos may be injurious to the health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.*

## Application

Apply by brush, speed brush, synthetic fibre roller or spray. For optimum CoolColour performance use one coat of Resene Quick Dry or Resene Galvo-Prime depending on substrate before applying Resene Lumbersider CoolColour.

## Concrete, etc

1. Seal where necessary with one coat of Resene Sureseal (see [Data Sheet D42](#)). Allow to dry for at least two hours. Apply one coat of Resene Quick Dry (see [Data Sheet D45](#)) and allow to dry.
2. Apply two coats Resene Lumbersider Low Sheen CoolColour allowing at least two hours between coats.

## Galvanised steel, Zincalume

1. Apply one coat Resene Galvo-Prime (see [Data Sheet D402](#)) or Resene Galvo One (see [Data Sheet D41](#)). Resene Galvo-One may need to be overcoated in Resene Galvo-Prime (see [Data Sheet D402](#)) for optimal CoolColour effect depending on colour choice – refer to Resene.
2. Apply two coats Resene Lumbersider Low Sheen CoolColour allowing at least two hours between coats.

## Timber

1. For optimum CoolColour effect, apply a full coat of an appropriate CoolColour primer, such as Resene Quick Dry (see [Data Sheet D45](#)), and allow to dry. For tannin-containing timber, such as cedar and redwood, apply a coat of Resene Wood Primer (see [Data Sheet D40](#)) before the CoolColour primer.
2. Apply two coats Resene Lumbersider Low Sheen CoolColour allowing at least two hours between coats.

## Precautions

1. Ensure correct primer and/or sealer is used.
2. Fill all nailholes and cracked timber after priming.
3. Galvanised steel and Zincalume must be primed before application of Resene Lumbersider Low Sheen CoolColour.

Resene Lumbersider Low Sheen is formulated to adhere to fresh timber surfaces. Dark colours may cause the rapid drying of damp timber with the ensuing danger of warping, though this effect will be lessened when a CoolColour is selected in place of a standard colour. A coat of solventborne Resene Wood Primer (see [Data Sheet D40](#)) will slow down the rate of drying and lessen the danger of warping.



Lumbersider SDS

*Please ensure the current Data Sheet is consulted prior to specification or application of Resene products. View Data Sheets online at [www.resene.com/datasheets](http://www.resene.com/datasheets). If the surface you propose to coat is not referred to by this Data Sheet, please contact Resene for clarification.*

**In Australia**  
PO Box 918, Ashmore City, QLD 4214  
Call 1800 738 383, visit [www.resene.com.au](http://www.resene.com.au)  
or email [advice@resene.com.au](mailto:advice@resene.com.au)

**Resene**  
the paint the professionals use

**In New Zealand**  
PO Box 38242, Wellington Mail Centre, Lower Hutt 5045  
Call 0800 RESENE (737 363), visit [www.resene.co.nz](http://www.resene.co.nz)  
or email [advice@resene.co.nz](mailto:advice@resene.co.nz)

Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001. Please recycle.

# Resene Waterborne Woodman

## penetrating oil stain

Resene Waterborne Woodman is a waterborne woodstain matching the needs of timber to the desire to achieve the most natural appearance possible.

### exterior

#### Typical uses

- Beams
- Fences
- Outdoor furniture
- Plywood and profiled sheets
- Timber - dressed and rough sawn
- Weatherboards

#### Physical properties

<b>Vehicle type</b>	Oil-modified acrylic
<b>Pigmentation</b>	Natural coloured oxides and limed colours
<b>Solvent</b>	Water
<b>Finish</b>	Fully penetrating over bare timber
<b>Colour</b>	Standard colours from the Resene Exterior timber stains colour chart
<b>Dry time (minimum)</b>	45 minutes at 18°C
<b>Recoat time (minimum)</b>	2 hours at 18°C
<b>Primer required</b>	No
<b>Theoretical coverage</b>	Dependent on surface
<b>Usual no. of coats</b>	2 (new work - see limitations); 1-2 (old work)
<b>Thinning and clean up</b>	Do not thin; clean up with water when wet; mineral turps when dry
<b>VOC</b>	c. 80 grams per litre (see <a href="#">Resene VOC Summary</a> )

#### Performance

#### Performance and limitations

1. Provides a genuine rustic look.
2. Very easy application.
3. Requires minimum surface preparation.
4. Contains powerful fungicides for mould resistance.
5. An Environmental Choice approved product.

#### Limitations

1. Will not kill existing mould. Use Resene Moss & Mould Killer (see [Data Sheet D80](#)).
2. Will not prevent checking of plywood.
3. Will require maintenance after two summers.
4. New dressed or dense timber may need a third coat after three months.

Please ensure the current Data Sheet and Safety Data Sheet are consulted prior to specification or application of Resene products. View Data Sheets online at [www.resene.com/datasheets](http://www.resene.com/datasheets). If in doubt contact Resene.





# Waterborne Woodsman penetrating oil stain

## Surface preparation

### Existing stains (non film-forming)

Remove all the weakly adhering coating by sanding. Treat with Resene Moss & Mould Killer (see [Data Sheet D80](#)).

### Exposed timber (greater than one week)

Remove any gross contamination and semi-detached cellulose fibres. Treat with Resene Moss & Mould Killer (see [Data Sheet D80](#)). Wash down with Resene Timber and Deck Wash (see [Data Sheet D813](#)), rinse with fresh water and allow to dry.

### New timber

Ensure surface is dry and free from dirt, dust and loose material.

### Caution

Sanding dusts from some hardwoods are considered carcinogenic and all old timber sanding dusts should be considered potentially harmful. Always wear an efficient dust mask.

*Sanding dust from old lead or chromate based paints or old building materials containing asbestos may be injurious to the health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.*

## Application

Apply by brush, speedbrush or roller. Saturate surface with Resene Waterborne Woodsman. During application stir the contents of the container frequently to ensure even distribution of colour. Aim to achieve the targeted coverage for the substrate as outlined below.

### Typical coverage

#### Badly weathered timber

First coat 3-4 square metres per litre.  
Second coat 5-7 square metres per litre.

#### Dressed timber

First coat 10-12 square metres per litre.  
Second coat 12-14 square metres per litre.  
Apply a third coat 12-14 square metres per litre after about three to six months.

#### Rough sawn timber

First coat 4-6 square metres per litre.  
Second coat 9-11 square metres per litre.

## Precautions

1. Will not penetrate through existing coatings or very hard latewood bands. For best results wipe excess Resene Waterborne Woodsman off with a dry, absorbent, lint-free cloth rubbing along the grain.
2. Contains powerful fungicides. Avoid skin contact. If any skin contact occurs, wash skin thoroughly with soap and water immediately. Do not scrub the skin.
3. Avoid breathing vapour - use with adequate ventilation.



Waterborne  
Woodsman SDS

Please ensure the current Data Sheet is consulted prior to specification or application of Resene products. View Data Sheets online at [www.resene.com/datasheets](http://www.resene.com/datasheets). If the surface you propose to coat is not referred to by this Data Sheet, please contact Resene for clarification.

**In Australia**  
PO Box 924, Beenleigh, Qld 4207  
Call 1800 738 383, visit [www.resene.com.au](http://www.resene.com.au)  
or email [advice@resene.com.au](mailto:advice@resene.com.au)

**Resene**  
the paint the professionals use

**In New Zealand**  
PO Box 38242, Wellington Mail Centre, Lower Hutt 5045  
Call 0800 RESENE (737 363), visit [www.resene.co.nz](http://www.resene.co.nz)  
or email [advice@resene.co.nz](mailto:advice@resene.co.nz)

Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001. Please recycle.